

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 23 March 2001 (23.03.01)	Applicant's or agent's file reference 23895
International application No. PCT/GB00/02803	Priority date (day/month/year) 20 July 1999 (20.07.99)
International filing date (day/month/year) 20 July 2000 (20.07.00)	
Applicant LOCK, Gary, Michael et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
 20 February 2001 (20.02.01)

☐ in a notice effecting later election filed with the International Bureau on:  
 \_\_\_\_\_

2. The election ☒ was  
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer S. Mafla
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>23894</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/GB 00/ 02801</b>	International filing date (day/month/year) <b>20/07/2000</b>	(Earliest) Priority Date (day/month/year) <b>20/07/1999</b>
Applicant <b>UNIVERSTTY OF WALES, BANGOR</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established by this Authority to read as follows:

**ELECTRODES FOR GENERATING AND ANALYSING DIELECTROPHORESIS**

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1A

☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/02801

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B03C5/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HOELZEL R: "ELECTROROTATION OF SINGLE YEAST CELLS AT FREQUENCIES BETWEEN 100 HZ AND 1.6 GHZ" BIOPHYSICAL JOURNAL, NEW YORK, US, US, no. 73, August 1997 (1997-08), pages 1103-1109, XP000937507 ISSN: 0006-3495 cited in the application page 1103, column 2, paragraph 3 -page 1105, column 1, paragraph 2; figure 2 --- -/--	1-3, 6, 19, 23



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 September 2000

Date of mailing of the international search report

02/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Decanniere, L

# PATENT COOPERATION TREATY

## PCT

REC'D 26 OCT 2001

WIPO PCT

### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)



Applicant's or agent's file reference 23895	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB00/02803	International filing date (day/month/year) 20/07/2000	Priority date (day/month/year) 20/07/1999
International Patent Classification (IPC) or national classification and IPC B03C5/02		
Applicant UNIVERSITY OF WALES, BANGOR et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 6 sheets, including this cover sheet.
  - ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 20/02/2001	Date of completion of this report 24.10.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Herry, M Telephone No. +49 89 2399 8666 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02803

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-29 as originally filed

**Claims, No.:**

1-15 as amended under Article 19

**Drawings, sheets:**

1/5-5/5 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02803

☐ the drawings, sheets:

5. ☒ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

**see separate sheet**

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes:	Claims 2-12, 14-15
	No:	Claims 1, 13
Inventive step (IS)	Yes:	Claims
	No:	Claims 2-12, 14-15
Industrial applicability (IA)	Yes:	Claims 1-15
	No:	Claims

2. Citations and explanations  
**see separate sheet**

## VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/GB00/02803

**ITEM I:**

In claim 13 the amendment "highly non-uniform alternating electric field", filed with the International Bureau under Article 19(1), introduces subject-matter which extends beyond the content of the application as filed, contrary to Article 19(2) PCT: the description as filed only states that a "varying / alternating electrical field" is applied (see e.g. p.5, l.2-3 and p.14, l.9-11). Thus, this communication is established, as if this amendment had not been made (Rule 70.2(c) PCT).

**ITEM V:**

See also Item VIII of the present communication.

Document SU-A-744 285 was not cited in the international search report. A copy of the document is appended hereto.

**Concerning independent claim 1:**

The subject matter of claim 1 is not considered to be new (Article 33(2) PCT).

In SU-A-744 285 (D1: see figure and abstract), particles suspended in a liquid are subjected to a moving ultrasonic wave and to a varying electrical field capable of generating a dielectrophoretic force on the particles (the ultrasonic radiator and the electrodes receive a synchronised signal), in order to perform a separation.

The applicant's attention is also drawn to the fact, that the combination of such a moving ultrasonic wave with a varying electrical field is known from XP000599271 (D2: p.1965, c.1; p.1967, end of c.2; p.1969, c.1).

**Concerning independent claims 11 and 12:**

The subject-matter of these claims differs over D1, in that the ultrasonic and electrical fields are applied with different frequencies or in different planes.

In D1, these fields are applied with the same frequency and in the same plane, in order to optimize separation through the provision of an increased dipolar moment. Applying these fields in the method of D1, but with different frequencies or in different planes does not involve an inventive step (Article 33(3) PCT), since this only results in a non optimized separation.

**Concerning independent claim 13:**

For the reasons mentioned above ("concerning independent claim 1"), the subject matter of claim 13 is not considered to be new (Article 33(2) PCT) over D1 or D2.

**Concerning dependent claims 2-10 and 14-15:**

These dependent claims do not seem to contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of inventive step, since they are either known from the documents cited in the search report, or they come within the scope of the customary practice followed by persons skilled in the art, especially as the advantages thus achieved can readily be foreseen.

In particular, the features of claims 7-10 are known from D1, while the features of claims 14-15 are a matter of normal design. The advantages of stationary ultrasonic waves (concentration of particles, see D2: p.1, c.2) and moving ultrasonic waves (for creating a "flow" of particles: see XP000938696, cited in the application: abstract) are known from the prior art (claims 3-4).



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/GB00/02803

**ITEM VII:**

Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in D2 is not mentioned in the description, nor is this document identified therein.

The independent claim should have been correctly delimited in the two-part form according to Rule 6.3(b) PCT, and the features of the claims should have been provided with reference signs placed in parentheses (Rule 6.2(b) PCT).

**ITEM VIII:**

The claims are not clear (article 6 PCT) for the following reasons.

Although claims 1, 11 and 12 have been drafted as separate independent claims, they appear to relate effectively to the same subject-matter and to differ from each other only with regard to the definition of the subject-matter for which protection is sought and in respect of the terminology used for the features of that subject-matter. The aforementioned claims therefore lack conciseness. Moreover, lack of clarity of the claims as a whole arises, since the plurality of independent claims makes it difficult to determine the matter for which protection is sought, and places an undue burden on others seeking to establish the extent of the protection.

Claims 11 and 12, which only state the provision of an "ultrasonic vibration" (while claims 1 and 13 relate to a moving ultrasonic standing wave), should have been clarified.

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
**WO 01/05513 A1**

- (51) International Patent Classification<sup>7</sup>: **B03C 5/02**
- (21) International Application Number: **PCT/GB00/02803**
- (22) International Filing Date: **20 July 2000 (20.07.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
9916851.0 **20 July 1999 (20.07.1999)** **GB**
- (71) Applicant (*for all designated States except US*): **UNIVERSITY OF WALES, BANGOR [GB/GB]**; College Road, Bangor, Gwynedd LL57 2DG (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **LOCK, Gary, Michael [GB/GB]**; 7 Hamilton Close, Lower Feltham, Feltham, Middlesex TW13 4PS (GB). **PETHIG, Ronald [GB/GB]**; Llyn, Telford Road, Menai Bridge, Anglesey, Gwynedd LL59 5DT (GB). **MARKX, Gerardus, Hendricus [NL/GB]**; 18 Fitzallan Street, Glossop, Derbyshire SK13 7DL (GB).
- (74) Agent: **GALLAFENT, Richard, John**; Gallafent & Co, 9 Staple Inn, London WC1V 7QH (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *With international search report.*  
— *With amended claims and statement.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **MANIPULATION OF PARTICLES IN LIQUID MEDIA**

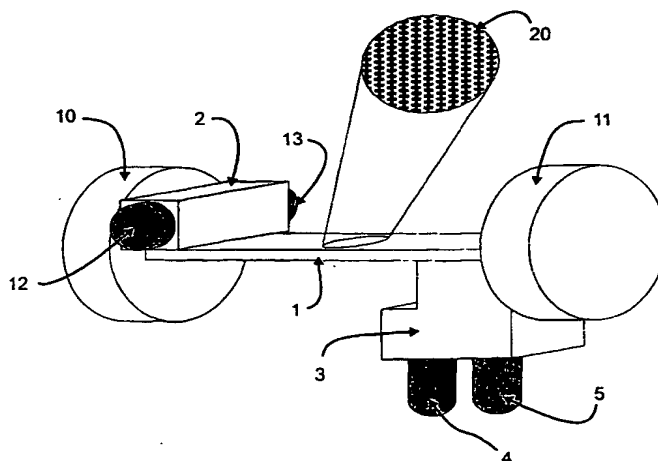

(57) Abstract: In a method of manipulating particles suspended in a liquid medium, a moving standing wave ultrasonic vibration and an electrical field capable of generating a dielectrophoretic force on the particles are applied. The ultrasonic vibration may be applied to move the particles from a first suspending liquid to a second suspending liquid, or to move the particles into proximity with electrodes to apply the dielectrophoretic force, or to move the particles into the centre of the liquid medium. Alternatively, the ultrasonic vibration and the electrical field may be applied simultaneously.

WO 01/05513 A1

- 1 -

**MANIPULATION OF PARTICLES IN LIQUID MEDIA**

This invention relates to the manipulation of particles  
5 in liquid media.

In recent years, much attention has been directed to the development of systems for manipulating particles in liquid media. The purposes for which particles may be  
10 usefully manipulated in liquid media are many and varied. For example, many different types of separation process make use of the fact that particles of differing types may be separated within a volume of liquid with particles then being drawn off from a specific point located within  
15 the volume of liquid, the particles being so drawn off then being of a different character from other particles drawn off from other points within the volume. Such separation processes may be expanded in application to non-particulate materials, for example large molecules or  
20 biological entities if they can be associated with carrier particles to form enhanced particles which then have different properties allowing their separation. Another area of increasing importance is the promotion of desired reactions, usually on a microscopic scale, by  
25 bringing reactants into contact, the reactants either

- 2 -

being in particulate form themselves or one or more of them being in the form of some form of particle having associated with it a generally non-particulate reactant.

5 Throughout this specification, the term "particle" is used to include biological cells, bacteria, viruses, parasitic microorganisms, DNA, proteins, biopolymers, non-biological particles, or any other particle which may be suspended in a liquid, in which dielectrophoretic and  
10 ultrasonic forces can be induced. It also applies to chemical compounds or gases dissolved or suspended in a liquid, where dielectrophoretic and ultrasonic forces can be induced. It further includes any particles which can be attached to larger particles, in which  
15 dielectrophoretic and ultrasonic forces can then be induced.

Two basic types of movement of a particle in a liquid medium may be easily identified, viz. the bulk movement  
20 of particles in a liquid medium as a result of bulk movement of the liquid medium itself and movement of the particles relative to the surrounding liquid medium where the medium may be thought of as essentially stationary. Of course, in the practical applications involving the  
25 manipulation of particles in a liquid medium, both sorts of movement occur.

In recent years, much progress has been made in harnessing the physical phenomenon known as  
30 dielectrophoresis to produce useful particle manipulation effects. As examples, reference may be made to papers by Marx et al, Dielectrophoretic Characterisation and Separation of Microorganisms, Microbiology (1994), 140, pages 585-591, and Pethig, Dielectrophoresis: Using  
35 Inhomogeneous AC Electrical Fields to Separate and Manipulate Cells, Critical Review in Biotechnology, 16(4), pages 331-348 (1996). As can be seen by the

- 3 -

extensive reference lists in both of these two papers, there has been much activity in the area of applying dielectrophoresis.

5 The patent literature also contains disclosures of dielectrophoretic separation methods as well as generalised particle manipulation methods using dielectrophoresis. Reference is made to International Publications WO 91/11262, WO 93/16383, WO 94/22583, WO  
10 97/34689 and US-A-5 454 472 in this connection.

We have now found that significant advantages in the manipulation of particles may be achieved by using, in combination with dielectrophoretic methods of  
15 manipulating them, ultrasonic manipulation.

Such a combination has been disclosed in a limited way in USSR Author's Certificate No 744285, Fomchenkov and Miroshnikov in which a cylindrical dielectrophoretic  
20 chamber is surrounded by a coaxial ultrasound transducer, and an ultrasound signal and a dielectrophoretic signal are applied at the same frequency in the same radial direction, and at synchronised phases. The diameter of the cylindrical chamber does not exceed the length of the  
25 ultrasound wave.

It is stated that "The geometric dimensions of the ultrasound radiator 8 are selected so that the place where the chamber is positioned a standing wave is  
30 generated, the rate of oscillation of which is directed over the whole cross-section of the chamber along the radius in the direction toward the axial electrode or away from it. In this way, the diameter of the chamber does not exceed the length of the ultrasonic wave", then  
35 goes on to state "The oscillatory frequency of the sources 16 and 17 are selected to be the same and their phases synchronised using synchroniser 18". Sources 16

- 4 -

and 17 refer to the signal sources for the ultrasound and dielectrophoresis, and as such the signals utilised for both the ultrasound and dielectrophoresis are at the same frequency with their phases linked. The reason for  
5 utilising the same frequency and linking their phase is given later where it is also stated "as a result, dispersed particles are polarised first by the electrical field and secondly by the ultrasonic field which attaches to them an additional electrical dipolar moment caused by  
10 the deformation of their double electrical layer. The interaction of the combined dipolar moment of a particle with the electrical field leads to a force arising directed in the region of maximum field strength at the axial electrode 4".

15 A disadvantage of such an arrangement is that the constraints imposed on the ultrasound frequency range (e.g. 1 to 6 MHz) by the chamber size also restricts the dielectrophoretic response correspondingly to a very  
20 small range. For dielectrophoresis to be of practical utility, a frequency range extending from at least 1 kHz to 10 MHz is required.

We have now found that such a frequency range can be  
25 achieved by use of the method and apparatus according to the present invention.

Further, in Fomchenkov, an external fluid flow is additionally required to achieve particle separation;  
30 separation cannot be achieved by use of ultrasound and dielectrophoretic forces alone. We have now found that by use of a method and apparatus according to the invention, particle separation can be achieved without the use of a fluid flow.

35 According generally to the present invention, there is provided a method of manipulating particles comprising

- 5 -

subjecting particles suspended in a liquid to a moving ultrasonic standing wave and to a varying electrical field capable of generating a dielectrophoretic force on the particles.

5

In contrast to the arrangement of Fomchenkov, the relative phases of the two signals need not be controlled.

- 10 Also according to the invention a method of manipulating particles comprising subjecting particles suspended in a liquid to an ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the particles, the ultrasonic  
15 vibration and the varying electrical field being of different frequencies.

- Further according to the invention a method of manipulating particles comprising subjecting particles  
20 suspended in a liquid to an ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the particles, the ultrasonic vibration and the varying electrical field being applied in different planes.

25

- Yet further according to the invention apparatus for treating particles suspended in a liquid comprising a chamber, means for feeding suspended particles into and out of the chamber, an electrode array on at least one  
30 wall of the chamber, means for applying to the electrode array an alternating electrical potential whereby to generate in suspended particles adjacent to the array a dielectrophoretic force, and means for subjecting the liquid in the chamber to a moving ultrasonic standing  
35 wave.

The technique of applying ultrasound to manipulate

- 6 -

particles in a liquid medium has been previously disclosed, for example in a paper by Peterson et al. "Development of an ultrasonic blood cell separator" IEEE eighth annual conference of the Engineering in Medicine and Biology Society, 1986, pages 154 to 156.

As reflected in that paper, the ultrasonic force on a compressible particle caused by a standing acoustic pressure wave is given by

10

$$F_{ultra} = \frac{\pi R^3 P^2 k}{3 \rho_0 C_0^2} \sin(2kx) \left[ \frac{1}{\delta \sigma^2} - \left( \frac{5\delta - 2}{2\delta + 1} \right) \right] \equiv b \cdot R^3$$

15

The dielectrophoretic (DEP) force exerted on a particle, as reflected in the paper by Marx et al referred to above at page 585, is given by

20

$$F_{DEP}(\omega) = 2\pi\epsilon_0\epsilon_m R^3 \operatorname{Re} \left[ \frac{\sigma_p^* - \sigma_m^*}{\sigma_p^* + \sigma_m^*} \right] \nabla E^2 \equiv a \cdot R^3 \text{ (r.m.s.)}$$

25

The explanation of the meanings of the symbols used in these two equations is given in the respective papers, and in the two equations noted above, it will be noted that, as reflected by the equivalences, the force is directly dependent upon the cube of the radius of the particle, all other things being equal. In other words, the force is dependent upon particle volume.

30

Clearly, by adjusting the conditions, i.e. by varying the parameters of the ultrasound and varying electrical fields applied, the arbitrary constants a and b may be made the same, i.e. the dielectrophoretic force acting on a particle can be made greater than, equal to, or less

35



- 7 -

than the ultrasonic force exerted on that particle. Because both of the forces are dependent upon the particle volume, variations in volume do not affect the ability to apply a balance of ultrasonic and  
5 dielectrophoretic forces or to make one exceed the other. Accordingly, the ability to manipulate the particles becomes effectively independent of their volume, and this enables much enhanced manipulations to be carried out. In particular, the relative size of particles has no  
10 effect on their ability to be separated using techniques involving the combined application of ultrasonic and dielectrophoretic forces to them.

In practical application of the method of the present  
15 invention, the dielectrophoretic and ultrasound forces may be applied simultaneously, but in addition they may be applied sequentially to secure appropriate movement of the particles. In particular, ultrasonic irradiation may be used in the absence of any dielectrophoretic force  
20 being applied to the particles to move particles in suspension in a liquid medium in a desired fashion. In accordance with a particularly valuable method according to the invention, ultrasonic irradiation is first used to move particles to be manipulated from a first liquid  
25 medium in which they are suspended into a second liquid medium, the conductivity, dielectric permittivity, pH and other physico-chemical properties of the second liquid medium being appropriate for enabling the generation of appropriate dielectrophoretic force on the individual  
30 particles. This is particularly valuable in connection with separation processes using dielectrophoresis since it provides an alternative to the customarily used centrifugation of the particles so that they may be removed from the first suspending liquid and then re-  
35 dispersed in a second known liquid, typically having characteristics, such as chosen conductivity value, to aid dielectrophoretic separation.

- 8 -

In like fashion, particles which have been subjected to dielectrophoretic separation, for example in accordance with some of the prior art techniques set out above, may be subjected to ultrasound in order to cause the

5 particles effectively to concentrate together, or even sediment out from the liquid medium in which they have been suspended during the dielectrophoretic separation. This concentration process may be used to increase the efficiency of practical separation apparatus.

10

As disclosed in the extensive prior art relating to dielectrophoretic manipulation referred to above, in order to generate adequate dielectrophoretic forces, the particles must be located in close proximity to

15 electrical field-generating electrode arrays.

Conventionally, this is often achieved simply by using gravity to allow particles in suspension to congregate adjacent electrode surfaces, but this can take a substantial time, particularly if the relative densities of the particles and the suspending liquids are close.

20 We have found that by using ultrasonic manipulation, particles suspended in a liquid may be moved into close proximity with a suitable electrode array rapidly. By using a moving standing ultrasonic wave, it is also possible to move particles across an electrode array.

In the practical application of the method of the present invention, apparatus is used which is constructed and adapted to enable the particles to be subjected to both  
30 ultrasonic and dielectrophoretic forces. Accordingly, in a further aspect, the present invention provides apparatus for treating particles suspended in a liquid medium including a chamber, means for feeding suspended particles into and out of the chamber, an electrode array  
35 on at least one wall of the chamber, means for applying to the electrode array an alternating electrical potential whereby to generate in suspended particles

- 9 -

adjacent the array a dielectrophoretic force, and means for subjecting the liquid in the chamber to ultrasonic vibration. In particular, the means for subjecting liquid in the chamber to ultrasonic vibration may be  
5 adapted to create a standing ultrasonic wave within the liquid in the chamber whereby particles suspended in the liquid will move to areas of either low or high ultrasonic pressure, nodes or anti-nodes. The particles will thus be formed into bands at the nodes or anti-  
10 nodes, and by changing the relative positions of these nodes, the particles may then be moved.

With an appropriately dimensioned treatment chamber, i.e. one which is narrow relative to the wavelength of the  
15 ultrasound used, it is possible to make particles move towards the walls of the chamber on which electrode structures are located. Thus, in a typical application, a volume of liquid having suspended in it particles requiring separation according to some appropriate  
20 criterion can be introduced into a chamber, the chamber then subjected to ultrasound to move the particles to the walls of the chamber, and thereafter the particles on the walls which bear electrode arrays can be separated using a combination of ultrasonic forces and dielectrophoretic  
25 forces exerted on them.

Using the methods of the present invention in this way, substantial separation efficiency may be achieved compared with the use of dielectrophoretic separation  
30 methods alone. In particular, by using combined ultrasound and dielectrophoretic forces, particles may be separated on the basis of both their mechanical and dielectric properties. Since both ultrasound and dielectrophoretic forces can be precisely controlled,  
35 better control of particle separation is possible, in comparison with use of fluid flow.

- 10 -

Dielectrophoretic forces are inherently short-range in their effect and so either a significant time must be allowed for particles to sediment on to the electrodes, or the apparatus must be arranged so that the particles are within a short distance of the electrodes, typically no more than 300 $\mu$ m, and preferably no more than 100 $\mu$ m. Ultrasound can be utilised to move cells rapidly on to the electrodes at chamber walls to facilitate efficient dielectrophoretic separation subsequently; for the conditions where the chamber height is in the order of the wavelength of the sound wave, cells start to move toward the walls of the chamber; (the exact dimensions will depend on the manner in which the ultrasound is applied and also the acoustic properties of the chamber walls). The wavelength of ultrasound in water at 20°C, for an ultrasound frequency range of 500kHz to 10MHz, is around 150 to 3000 microns, so the dielectrophoresis chamber may be an order of magnitude larger than a chamber employing no ultrasound.

The invention is illustrated by way of example with reference to the accompanying drawings in which:

Figure 1 shows a simple separation device;

Figures 2 and 3 are photographs taken through the electrode array showing particle distribution around the electrodes;

Figures 4A and 4B illustrate an alternative separation cell;

Figure 4C indicates connection of the electrodes;

Figure 4D indicates the particle movement;

Figure 4E shows schematically a complete separation

- 11 -

system; and

Figure 5 shows DEP spectra of the particles.

- 5 Referring to Figure 1, this shows diagrammatically a separation unit consisting essentially of a central separation chamber 1 which is in liquid communication with an input chamber 2 and an output chamber 3 having two sample output ports 4 and 5. At each end of the
- 10 chamber 1 are located ultrasonic transducers 10, 11 and likewise two ultrasonic transducers 12 and 13 are located at each end of the input chamber 2 which is mounted transversely with respect to the chamber 1.
- 15 On the walls of chamber 1 is an array of castellated electrodes of appropriate size and spacing to enable dielectrophoretic forces to be exerted on particles within the chamber 1 when appropriate alternating electrical potentials are applied to the electrodes. The
- 20 electrode array is illustrated diagrammatically in magnified scale at 20 in Figure 1.

For the sake of simplicity, means for feeding a liquid with particles suspended in it to the input chamber 2, through the separation chamber 1 and then through the output chamber 3 are omitted, as are any of the electrical connections necessary to drive the transducers and to apply the alternating voltages to the electrode array illustrated at 20. Also not shown in the diagram

30 are means for selectively opening outlets 4 and 5 from the outlet chamber 3.

In use of the apparatus, a sample of liquid containing suspended particles is placed in chamber 2. By applying appropriate signals to transducers 12 and 13, an ultrasonic frequency standing wave may be set up within the volume of liquid in chamber 2. This standing wave

35

- 12 -

causes the particles either to move to areas of low ultrasonic pressure or to areas of high ultrasonic pressure depending on their relative acoustic properties and accordingly causes the particles to group together in  
5 bands. Once grouped, the individual particles can be considered as larger group particles which can be sedimented and controlled more easily. They may then be moved in a controlled manner, by sedimenting them from the suspending liquid, in chamber 2 and re-suspending  
10 them into the liquid of chamber 1. Prior to any separation, a liquid fills all of chambers 1, 2 and 3 and output point 4, 5.

Once introduced into the separating chamber 1, the  
15 transducers 10 and 11 are driven with an appropriate signal to generate an ultrasonic standing wave which moves along the length of the chamber from left to right. Provided that the vertical dimension (as shown in Figure 1) of chamber 1 is in the range of the wavelength of the  
20 ultrasound produced by transducers 10 and 11, the particles are pushed towards the walls of the chambers 1 on which the electrode array 20 is located. By applying electrical signals to the electrode array 20 of appropriate frequency and amplitude, and by adjusting the  
25 signals applied to transducers 10 and 11, it is possible to subject the particles adjacent the electrode array to both dielectrophoretic and ultrasonically generated forces. In particular, particles of specific properties may be held on the electrode array while other particles  
30 which do not have those properties may be moved along chamber 1 away from input chamber 2 and towards output chamber 3, in a moving ultrasonic standing wave.

On reaching the end of chamber 1, the particles reach a  
35 barrier preventing them from passing any further. This barrier may be of a thin material and of similar acoustic properties to that of the suspending medium (to thus

- 13 -

present minimal disruption to the ultrasonic field), such as an adapted thin glass microscope coverslip. The particles will then start sedimenting toward collection ports 4 and 5. Between collection ports 4 and 5 and the main chamber 1 is a switching valve system in the form of a flap. This directs the particles toward either port 4 or 5 for collection. In this instant, particles are directed toward port 4.

10 Thereafter, output port 4 is closed and output port 5 opened and the electrical signals applied to transducers 10 and 11 and to electrode array 20 may be varied to release the previously held particles and accordingly enable them to be collected from port 5. Thus, if at 15 ports 4 and 5 suitable collection receptacles such as bijou bottles are located, the particles will sediment into them. Particles of one type will sediment at port 4 and particles of a different type will sediment at port 5.

20 Using appropriate programmed control, the apparatus shown in Figure 1 may be used sequentially to treat a number of batches of liquid each containing both types of particle to produce two containers, one of which contains a 25 desired particle type(s) and the other of which contains the undesired particle types.

Shown in Figures 2 and 3 are photographs showing the electrode array 20, in each case showing just four 30 individually castellated electrode strips, and wherein the illumination has been adjusted to show the presence of yeast cells as pearl grey areas against the clear liquid background and between the darker grey castellated electrodes.

35 Figure 2 shows a stage in the procedure where a sample of suspended yeast cells, some alive and some dead, has been

- 14 -

introduced into the chamber and subjected to both ultrasound and dielectrophoretic forces. As can be clearly seen, the effect of the ultrasound is to group the cells into bands parallel to the longitudinal extension of the castellated electrodes. The cells, once in these bands are subjected to dielectrophoretic forces and these may be adjusted so that the cells are moved to be held by the array. In the example of Figure 2, the alternating electrical potential applied to the electrodes is a potential of three volts oscillating at a frequency of 500 kHz in a medium of conductivity  $50\mu\text{s/cm}$ . As can be seen, the greyish bands of cells concentrate between the castellated electrodes and held by positive DEP forces.

After an appropriate time period, e.g. 1 to 20 seconds, the alternating voltage applied to the electrode array is changed to one of e.g. twelve volts peak to peak and a frequency of six MHz. This causes live yeast cells to be held stationary relative to the electrode array rather more strongly than dead yeast cells. By suitably driving the transducers 10 and 11 at the end of the chamber 1, the standing ultrasonic wave may be caused to travel away from chamber 2 and towards chamber 3 sweeping dead yeast cells along the chamber as it does so. These accordingly arrive in chamber 3 and can be removed. Meanwhile, the live yeast cells are held in the electrode array, from which they can subsequently be removed when desired by changing the voltage and frequency applied to that electrode array, whereafter they may be collected on output chamber 3 likewise.

Figure 3 shows the ultrasound "pulling" at, and moving the cells held by the electrodes by positive DEP forces, as is shown. This clearly shows the level of control attainable by utilising the ultrasonic and dielectrophoretic forces in combination, where particles



- 15 -

held by strong positive DEP, by marginally differing values, can be discriminated and separated. This level of control is not only desirable, but has much application.

5

The above explanation demonstrates how the apparatus of Figure 1 may be used to effect separation of particles within a batch of liquid introduced into chamber 2. In an alternative approach, a quantity of particles in  
10 suspension may be introduced from chamber 2 into chamber 1 and brought e.g. by ultrasonic sedimentation and movement to the electrode region. The particles in liquid suspension may then be moved backwards and forwards along chamber 1 using ultrasonic standing waves  
15 generated by transducers 10 and 11 and this combined with appropriate signal application to the electrode array 20 may enable particles to be selectively held when the travelling wave is moving in one direction and released when moving in the other. Thus, one particle type may be  
20 moved towards one end of the chamber 1 and other particle types to the other end of chamber 1. If the particles from chamber 2 are introduced somewhere into the middle section of chamber 1, the apparatus may be operated continuously with two separated streams of particles  
25 being collected at locations at either end of chamber 1. Alternatively, this process may also be achieved by introducing particles by means of fluid flow into chamber 1, when chamber 2 is not required. This can be advantageous where the particles, for example, are  
30 already suspended in a medium of the desired conductivity and re-suspension is not required.

The movement of the standing wave may be achieved by a number of known electronic techniques; phase sweeping,  
35 frequency sweeping or frequency offsetting of the relative signals applied to the transducers 10 and 11, or alternatively mechanically by changing the chamber

- 16 -

dimensions. Similarly the standing ultrasonic wave may be generated by a single transducer and a reflector, or two or more transducers.

- 5 In a variation for use with fragile particles, such as blood cells, or where minimising trapping and/or sticking of particles to the chamber walls and/or electrodes is critical, the ultrasound may be used to move the particles toward the centre of the chamber, instead of  
10 towards the chamber walls. In this case, either a higher ultrasonic frequency (for a chamber of unchanged dimensions), or increased chamber height, may be utilised to meet this objective. In these circumstances, where particles are towards the centre of the chamber, it is  
15 advantageous to minimise the modulation of the chamber walls, thus preferably the chamber may be made of a material of low Young's modulus, such as a soft plastic.

- Conversely, if the particles are moved toward the chamber  
20 walls, it is beneficial to maximise the modulation of the walls. The chamber is preferably made of a material of a high Young's modulus, such as glass.

- It has been found that vibration of the chamber walls can  
25 additionally help minimise particles sticking to the walls, the chamber walls may be vibrated with this purpose in mind, either utilising the transducers used for producing the standing wave in the chamber, utilising an external transducer, or manufacturing the walls of the  
30 chamber from a piezoelectric material.

- Vibration of the chamber walls may also be beneficial after a separation is completed, whereby very high power ultrasound can be utilised for the purpose of damaging  
35 and/or disintegrating and/or dissolving the particles left in the middle of the chamber and/or on the chamber walls. Ultrasonic cleaning and/or sterilisation of the

- 17 -

chamber after dielectrophoretic separation can thus be achieved.

One or more of these variants may be used in combination, such that, for example, the ultrasonic frequency may be changed, with one separation being undertaken with the particles primarily formed in the centre of the chamber and moved by the ultrasound, followed by a second separation being undertaken with the particles primarily forming on the walls of the chamber and there moved by the ultrasound standing wave. Utilising one or more variants is beneficial for complex separations.

It has been found that heating presents a considerable problem when utilising ultrasound. This is mainly due to the acoustic impedance of efficient piezoelectric ultrasonic transducers such as PZT, being vastly different to the acoustic impedance of the propagation medium in which the particles are suspended, i.e. water. This results in a mismatch at the interface, with a considerable amount of the energy being reflected back and dissipated as heat.

Acoustic impedance can be considered as an analogue of electrical impedance and thus the principles of radio frequency impedance matching can be applied, as is known. Using these principles, it was calculated in the order of 92% of the energy transmitted by a PZT transducer is reflected back at the water interface and dissipated as heat. By using two layer impedance matching, bonding a quarter wave ( $\lambda/4$ ) section of aluminium on to the front of a PZT transducer and bonding a  $\lambda/4$  section of PMMA on top of this, the situation may be considerably improved, where  $\lambda$  = wavelength. The choice of using aluminium is because its acoustic impedance is between that of PZT and water and using polymethyl methacrylate (PMMA) because it is between that of aluminium and water. So essentially

- 18 -

the impedance of the aluminium is matched to the PZT, the PMMA to the aluminium, and then the PMMA to the water. This reason for the  $\lambda/4$  thickness or odd multiples of (i.e.  $\lambda/4$ ,  $3\lambda/4$ ,  $5\lambda/4$ , etc.) is well-known.

5

Two layer impedance matching, using aluminium and PMMA was found to improve matters considerably, with around 92% of energy now being transmitted. Efficiency was thus considerably improved and heating minimised. Alternative materials to aluminium and PMMA may be used for this purpose, as may additional matching layers be used to improve efficiency further.

10

It has been found by mathematically modelling the sound waves within the chamber that utilising impedance matching offers additional benefits, not just that of minimising heating. A sound wave travelling down a chamber moves in both time and in space. On reaching the end of the chamber, it will be reflected and thus travel back down the chamber from the direction which it came. It will then constructively and destructively interfere with the outward travelling wave and when averaged over time, it will produce what is known as a standing wave. For this reason, chamber 1 and chamber 2 of Figure 1 may alternatively be implemented with a single transducer and reflector for each, with two opposing transducers not being required, but preferred. When two opposing transducers are used, the reflections at the ends of the chamber are detrimental. From modelling these effects, it was found that when using phase sweeping to move the standing wave, as the phase was changed over a cycle (I.e. 0 to 360 degrees), the amplitude of the standing wave was changed noticeably. This was a result of the second, third and fourth order, etc. reflections from the face of the opposing faced transducer interfering with the primary transmitted waves. By using impedance matching on the face of the transducers (as already

20

25

30

35

- 19 -

outlined), these secondary reflections are minimised. The result is that the amplitude of the standing wave remains relatively constant over a cycle, with significant improvements to the level of control of  
5 particles achieved.

The application of impedance matching for combined ultrasound and dielectrophoretic separations is therefore preferred. The benefits of using impedance matching not  
10 only applies to phase sweeping, but includes all other methods of electrical and mechanical control of the standing wave, and when one or more transducers is used.

Referring to Figure 1, as a variation, a vertical chamber  
15 may instead be used for chamber 2, rather than the horizontally mounted chamber which is generally preferred. The use of a vertical chamber typically results in particles having to move greater distances. It has been found that when moving bands of particles  
20 over greater distances, the breaking up of these bands is more likely to occur, with sedimentation efficiencies effected.

Sedimentation in chamber 2 can be achieved by either  
25 utilising a moving standing wave, combination of a moving standing wave and a stationary standing wave, or by pulsing the signals applied to the ultrasonic transducers 12, 13. The pulsing of the signals results in the standing wave momentarily being removed, with the  
30 particles sedimenting but also dispersing from their bands. The process of applying the standing wave, momentarily removing it, then re-applying (i.e. the result of pulsing of the signal), allows the particles to sediment in a controlled manner.

35

It is preferred that the chamber be circular in cross-section, thus to form a barrel shaped chamber. Improved

- 20 -

sedimentation time and efficiency result. Preferential conditions can further be improved by using a Bessel sound field. By making the region of the ultrasonic transducer which is excited equal to  $2/3$  of the diameter of the chamber, and also (not necessary, but preferred) the diameter of the transducer which is excited equal to three times the thickness of the transducer, a Bessel sound field is generated, producing maximum pressure in the centre of the chamber and minimal pressure at the chamber wall, as is well-known. This concentrates the particles toward the central region of the chamber, allowing further improved sedimentation and control.

Additionally significant improvements to sedimentation efficiency is achieved when impedance matching is used, matching the impedance of the transducer to the suspending medium. This improves efficiency of the transfer of sound energy into the chamber, thus reducing heating. Heating not only affects for example the integrity of biological cells, but results in producing regional fluid movement within the chamber, which in turn disrupts the bands and has a marked effect on control and sedimentation efficiency. By placing a thin barrier such as a glass microscope coverslip (approx. 0.1mm thick) in front of the transducers, enclosing a fixed volume of liquid isolated from the main chamber, the effects of heating and the disrupting of cell banding can be significantly reduced further. The use of a thin barrier enclosing a fixed volume of liquid in front of the transducers, and its benefits, applies equally to use in chamber 1 where particles are being separated, as it does to use in chamber 2 where particles are being sedimented and re-suspended. It is thus preferably used in both chambers.

35

The above variations may be used individually and in combination. When all combined, very high sedimentation

- 21 -

efficiencies can be achieved. Efficiencies of greater than 99% (percentage of particles removed from suspension) may be obtained for particular particles and concentrations.

5

All the above aforementioned examples of using ultrasound in conjunction with dielectrophoresis apply equally to static DEP fields (i.e. where a stationary non-travelling field is applied to the electrodes), as it does to travelling wave dielectrophoresis (TWD) where travelling fields are employed. Travelling fields are produced by applying multi-phased signals to adjacent electrodes, as is well known in the field of dielectrophoresis. As such, ultrasound may be used in conjunction with TWD to perform particle separation. For example, in Figure 1, the electrodes 20 of chamber 1 may be replaced by straight parallel electrodes along the chamber's length, with these electrodes in turn being connected to a multi-phased signal to generate a travelling field. Particles introduced to chamber 1 may then be separated by a combination of ultrasonic and TWD forces.

Particles in chamber 1 of Figure 1 may also be separated by applying the principles of field flow fractionation (FFF) combined with dielectrophoresis (DEP). In this case, ultrasound is used to transport the particles rather than bulk fluid flow. Bulk fluid flow and ultrasound may also be used in combination with dielectrophoresis.

30

Changes in the suspending medium properties in chamber 1 can have a marked effect on particle separations and efficiency. Referring to Figure 1, when performing a separation in chamber 1 of combined ultrasound and DEP, it may also be beneficial to introduce fluid flow. For example, a small amount of fluid flow may be introduced along the chamber to stabilise the properties of the

- 22 -

suspending medium. When chamber 2 is used to re-suspend particles from an unknown suspension medium into chamber 1 which contains known medium, the particles are likely to bring with them additional items which can change the suspending medium's physico-chemical properties, for example excess ions, which can change the conductivity. To offset the effect of this fluid of known property can be introduced into chamber 1. Fluid flow may also be introduced in chamber 1 as an additional force in combination with ultrasound and dielectrophoresis.

Referring to Figure 1, fluid flow used in conjunction with chamber 2 may also be beneficial for continuous separation. This method has certain advantages over a batch process, in which 10 ml of suspended particles is repeatedly introduced the particles sedimented into chamber 1 and the fluid removed and replaced with another suspension. For continuous separation, chamber 2 can remain filled with fluid and suspended particles continuously flowed into this chamber and sedimented with ultrasound.

A number of options are available when it is desired to perform combined ultrasonic and dielectrophoretic separations with the particles first formed in the centre of the chamber, and then, at a later stage, the particles formed on the walls of the chamber, or vice versa. One option is to change the dimensions of the chamber, but more preferable is to change the ultrasonic frequency to achieve this. The efficiency of the transducer may be reduced which would enable it to be used over a wider frequency range. Alternatively, the same high efficiency transducer may be used, but the harmonics of the transducer excited. For example, a 1 MHz transducer typically has harmonics at just over 3 MHz and 5 MHz. The same transducer may be used at these frequencies, allowing particles to be moved toward the centre or



- 23 -

toward the walls of a chamber. It may also be beneficial to not only apply differing frequencies to the transducers at different points in time, but also to apply a combined frequency signal to the transducers at the same time.

Typically, the signal applied to one of the transducers can be considered as the reference and the other signal varied, i.e. phase or frequency swept, or frequency offset, relative to this, in order to move the standing wave and thus particles. As a further variation, both signals may be varied relative to each other at the same time. The result is either particles moving toward the centre of the chamber from both ends (at the same time), or the movement of particles from the centre toward either end. The same effect may also be achieved mechanically. Such an approach can be particularly valuable when applying a variation of FFF (field flow fractionation).

20

Figure 4 shows a device based on negative dielectrophoretic (DEP) forces for separation of two or more particle types. Figure 4A shows a chamber 30, typically comprising upper and lower glass substrates sandwiches together to leave a central gap of 100 to 300 microns. The chamber has a first pair of cross flow ports 32, 34 at an input end, and a second pair of cross flow ports 36, 38 at an output end. At the output end and upstream of the ports 36, 38 are two output ports 40, 42 at opposite sides of the chamber.

At each end of the chamber 30, there is an ultrasonic transducer 44, 46 operable to generate in the chamber a standing wave having nodes and anti-nodes indicated by the thick bars 48; the standing wave is arranged to move from left to right in the figure.

- 24 -

If a particle suspension is caused to flow from port 32 to port 34 as shown by the arrow I, then the moving standing wave between transducers 44 and 46 may remove the particles from this cross fluid flow suspension and  
5 divert them along the chamber as shown by the arrow I'.

Figure 4B shows the DEP electrodes 50 arranged in pairs along opposite sides of the chamber 30 at angles to the direction of flow to form a fishbone array. The  
10 electrodes extend at an angle across the direction of movement of the particles caused by the ultrasonic field, except for a central strip which has no electrodes. Figure 4C shows that electrodes of each pair are connected to opposite sides of an AC signal source 52 by  
15 connectors 54, 56. The connections form a mirror image across the array so that in all of the electrode pairs, the upstream electrode is connected to the same side of the source 52.

20 The gap between individual electrode pairs is significantly less than it is between adjacent electrode pairs, as is seen for the electrodes 50 shown in Figure 4b, 4c and 4d. For example, 40  $\mu\text{m}$  wide electrodes, 40  $\mu\text{m}$  gap between the electrode pairs and 250  $\mu\text{m}$  between  
25 adjacent pairs. By applying a signal of a desired frequency, a strong (relative) negative DEP force will be generated in the region between the electrode pairs. However, between adjacent pairs, the gap is significantly greater and so a very much weaker negative DEP force is  
30 generated. The result of this is that as particular particle passes along the chamber, it will see the regions between the electrode pairs as being "walls", or very strong barriers of negative DEP, repelling it from these regions. With the electrodes slanted at an angle  
35 toward the centre of the chamber, the particle will be guided toward this region in the centre of the chamber by the barriers of negative DEP.

- 25 -

Suppose there are two types of particle in the suspension and that a signal frequency is chosen at which one particle, type S, experiences a strong negative DEP force while the other particle type W experiences a weak  
5 negative DEP force. As both types are moved along the chamber 30 and across the electrodes 50, type S particles will be guided preferentially towards the centre of the chamber as indicated in Figure 4D by the arrows G, while type W particles will pass along the chamber as they are  
10 relatively unaffected. The result is that there is a particle concentration effect.

Referring once more to Figure 4B, between ports 40 and 36 on one side of the chamber and between ports 42 and 38 on  
15 the other side are a pair of angle barriers 60, 62 arranged to divert particles near the edges of the chamber 30 out through the ports 40, 42. The barriers are of a material of similar acoustic impedance to water, for example glass, and are thin in comparison with the  
20 wavelength of the applied ultrasonic wave so as to cause minimal disturbance to the moving standing wave.

To assist with the removal of particles at ports 40 and 42, a small amount of fluid may be extracted from these  
25 ports with fluid introduced at additional ports downstream of ports 32 and 34 to account for this (not shown). The level of fluid flow used for this purpose will typically be small in that it will not affect the separation in chamber 30. Alternatively, as a variation,  
30 TWD (travelling wave dielectrophoresis) electrodes may be used to remove these particles at ports 40 and 42, or both fluid flow and TWD used in combination.

Further downstream of the ports 40, 42, a cross flow of  
35 fluid is established between ports 36, 38 as indicated by the arrow O. Particles passing along in the ultrasonic field will reach a barrier in front of transducer 46.

- 26 -

They will be unable to pass any further and will be removed by the cross fluid flow through port 38. The barrier may be similar to that of 60, 62, for example, of thin glass or thin polyimide film; a typical thickness of  
5 100  $\mu\text{m}$ .

Thus an enriched stream of type S particles is separated from the type W particle stream.

10 Figure 4E illustrates schematically the entire flow system. An input chamber 64 contains a suspension of type S and type W particles to be separated and is connected by pipe 66, 68 to the cross flow ports 32, 34. At the output end of the chamber 30 is an optional  
15 secondary DEP separation and purification stage 17 connected by pipe 72, 74 to the cross flow ports 36, 38 and having an output port 76. If a secondary separation is not essential, then port 38 can constitute a direct output port.

20 The use of negative DEP force in a separation process is particularly effective when particles in high concentration are to be separated, for example at a concentration of 100 million particles per millilitre or  
25 more, and when a large volume of suspension is to be processed, typically tens of millilitres of suspension.

Referring to Figure 4e, the implementation is particularly versatile in that it allows for continuous  
30 separation to be performed. The suspending medium properties of the cross fluid flow between ports 32 and 34 may be different to that of the central chamber 30. Additionally, the suspending medium properties of the cross fluid flow between ports 36 and 38 may be different  
35 again from both that of the chamber 30 and between ports 32 and 34. This allows, for example, particles suspended in an unknown fluid to be introduced into chamber 64.

- 27 -

This suspension is then flowed across chamber 30 between ports 32 and 34. The conductivity and other physico-chemical properties of the suspending medium in chamber 30 are chosen to be preferable for the separation of these particles. The particles in the cross fluid flow between ports 32 and 34 are removed and taken along the chamber in the ultrasonic standing wave. As the particles pass over the electrodes 50, those of the desired type are enriched in the centre of the chamber and pass to the end. When these particles reach the end of the chamber, they are removed from the chamber by the cross fluid flow between ports 36 and 38, and passed into chamber 70. The conductivity and other physico-chemical properties of the suspending medium in chamber 70 and thus also the fluid flowing between ports 36 and 38 is chosen to be preferable for a secondary DEP separation stage, such as a TWD (travelling wave dielectrophoresis). Additionally, the flow rate between ports 32 and 34 can be varied and adjusted to compensate for differing concentrations of particles in the solution contained in chamber 64, and so essentially a vast range of particle concentrations can be handled from chamber 64, whilst the concentration of the particles in chamber 30 may remain constant. The rate at which the standing wave travels along the chamber can also be adjusted in line with this. The result of this is that optimum separation conditions can be achieved, even when the sample introduced is of varying conductivity and varying suspending medium properties, and that a prior stage to re-suspend the particles and/or dilute and/or enrich the sample is not required. Similarly, the flow rate between ports 36 and 38 may also be adjusted.

As a further variation, ports 32 and 34, and/or ports 36 and 38, may be moved from those shown in Figure 4e so that the cross fluid flow between the port pairs may be at an angle relative to the length of chamber 30 and the

- 28 -

ultrasonic standing wave. This can be beneficial to the efficiency of introducing and/or removing particles from the ultrasonic field in chamber 30.

- 5 As a further variant, the volume of fluid in this system may also be fixed and enclosed in that fluid flowing between ports 32 and 34 and chamber 64 is fixed, as is the fluid flowing between ports 36 and 38 and chamber 70. The result of this is that the application of fluid flow  
10 does not result in dilution of the sample. When a non-enclosed system is used, considerable dilution of the sample can result.

- Figure 4c shows electrodes of each pair connected to  
15 opposite sides of an AC signal source. Additionally, the electrode of the adjacent pair is also connected to the opposite side of the AC signal source, as shown in Figure 4c. This means that not only will a DEP force be generated between the electrode pair, but a much weaker  
20 DEP force will be generated between the electrodes of adjacent pairs. The electrodes may alternatively be connected so that no DEP force is generated between the electrodes of adjacent pairs. This is achieved by connecting the electrodes such that the electrode of the  
25 adjacent pair is connected to the same side of the AC signal source. They will thus be at the same potential and no DEP force will result between them.

- Additionally, as a further variant, the dielectric  
30 properties of one or more of the particles being separated may be altered to achieve a desired separation. This may include factors such as changing the physiological properties of the particles, stressing the particles, changing the temperature of the sample, adding  
35 chemicals to the particle suspension, attaching additional particles such as antibodies or proteins, or, more particularly, for biological particles, the

- 29 -

selective killing or damaging of specific particles to thus enhance a separation, an example of which may be the stressing or lysing of red blood cells.

- 5 In general, practical application of ultrasound for particle manipulation has been found to be preferable in the lower MHz frequency range (typically 1MHz to 6MHz), particularly for biological cells or micron or sub-micron particles, as is well-known (Peterson et al, Development  
10 of an ultrasonic blood cell separator, IEEE 8th annual conference of the Engineering in Medicine and Biological Society, 1986, pages 154-156, particularly page 154).

- As an example, Figure 5 shows dielectrophoresis spectra  
15 expected for human red blood cells (rbc's) and T-lymphocytes white blood cells (wbc's) in a medium of conductivity  $200\mu\text{S}/\text{cm}$ . The T-lymphocyte spectra is shown as a dotted line, whilst the red blood cell (rbc) spectra is shown as a solid line. For the separation of these  
20 two particles, the preferred case is where one of the particle types is held by a positive DEP force, whilst the other feels a negative DEP force being pushed away from the electrodes. The frequency which would preferably be used for separating these two particles is  
25 indicated as F1, approximately 130kHz.

- It is seen from Figure 5 that the ultrasound frequency (typically 1 to 6 MHz - corresponding log value 6 to 6.8) is vastly different to the DEP preferred frequency 130  
30 kHz, F1 (log value 5.1). Different frequencies for the ultrasound and DEP are preferred.

- 30 -

CLAIMS

1. A method of manipulating particles comprising  
subjecting particles suspended in a liquid to a moving  
5 ultrasonic standing wave and to a varying electrical  
field capable of generating a dielectrophoretic force on  
the particles.
2. A method according to Claim 1 in which the  
10 ultrasonic vibration and the varying electrical field are  
applied at different times.
3. A method according to Claim 1 or 2 in which a  
stationary ultrasonic wave is applied followed by a  
15 moving ultrasonic wave.
4. A method according to Claim 1 or 2 in which a moving  
ultrasonic wave is applied followed by a stationary  
ultrasonic standing wave.  
20
5. A method according to Claim 2 in which the  
ultrasonic vibration is applied initially to move the  
particles from a first liquid medium into a second liquid  
medium.  
25
6. A method according to Claim 2 in which the  
ultrasonic field is applied to move the particles into  
close proximity with an electrical field generating  
electrode array.  
30
7. A method according to Claim 2 in which the  
ultrasonic vibration is applied to move the particles to  
the centre of the liquid medium.
- 35 8. A method according to Claim 1 in which the  
ultrasonic vibration and the varying electrical field are  
applied simultaneously.



- 31 -

9. A method according to Claim 8 for separating two types of particles comprising applying a moving ultrasonic standing wave so as to move both types of particle across an electrode array, and applying to the  
5 electrode an electrical signal at such a frequency that one type of particle experiences a strong negative DEP force and is diverted into one region of the electrode array while the second type of particle experiences a weak negative DEP force and is relatively unaffected as  
10 it is moved across the array.
10. A method according to any preceding Claim further comprising the use of fluid flow to assist the manipulation of the particles.
- 15 11. A method of manipulating particles comprising subjecting particles suspended in a liquid to an ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the  
20 particles, the ultrasonic vibration and the varying electrical field being of different frequencies.
12. A method of manipulating particles comprising subjecting particles suspended in a liquid to an  
25 ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the particles, the ultrasonic vibration and the varying electrical field being applied in different planes.
- 30 13. Apparatus for treating particles suspended in a liquid comprising a chamber, means for feeding suspended particles into and out of the chamber, an electrode array on at least one wall of the chamber, means for applying to the electrode array an alternating electrical  
35 potential whereby to generate in suspended particles adjacent to the array a dielectrophoretic force, and means for subjecting the liquid in the chamber to a

- 32 -

moving ultrasonic standing wave.

14. Apparatus according to Claim 13 in which the chamber is a rectangular separation chamber, there being a pair  
5 of ultrasonic transducers arranged one at each end thereof, and in which the means for feeding suspended particles into the separation chamber comprises an input chamber mounted transversely to the separation chamber, the input chamber having a pair of ultrasonic transducers  
10 arranged one at each end.

15. Apparatus according to Claim 13 in which the chamber is a rectangular separation chamber, there being a pair of ultrasonic transducers arranged one at each end  
15 thereof, and in which the electrode array is an array of electrode pairs along each side of the chamber, whereby particles which are moved across the array by the moving standing ultrasonic wave and which experience a strong negative DEP force at the applied frequency are moved  
20 towards the centre of the chamber.

## AMENDED CLAIMS

[received by the International Bureau on 4 December 2000 (04.12.00);  
original claim 13 amended; remaining claims unchanged (3 pages)]

1. A method of manipulating particles comprising  
subjecting particles suspended in a liquid to a moving  
5 ultrasonic standing wave and to a varying electrical  
field capable of generating a dielectrophoretic force on  
the particles.
2. A method according to Claim 1 in which the  
10 ultrasonic vibration and the varying electrical field are  
applied at different times.
3. A method according to Claim 1 or 2 in which a  
stationary ultrasonic wave is applied followed by a  
15 moving ultrasonic wave.
4. A method according to Claim 1 or 2 in which a moving  
ultrasonic wave is applied followed by a stationary  
ultrasonic standing wave.  
20
5. A method according to Claim 2 in which the  
ultrasonic vibration is applied initially to move the  
particles from a first liquid medium into a second liquid  
medium.  
25
6. A method according to Claim 2 in which the  
ultrasonic field is applied to move the particles into  
close proximity with an electrical field generating  
electrode array.  
30
7. A method according to Claim 2 in which the  
ultrasonic vibration is applied to move the particles to  
the centre of the liquid medium.
- 35 8. A method according to Claim 1 in which the  
ultrasonic vibration and the varying electrical field are  
applied simultaneously.

9. A method according to Claim 8 for separating two types of particles comprising applying a moving ultrasonic standing wave so as to move both types of particle across an electrode array, and applying to the  
5 electrode an electrical signal at such a frequency that one type of particle experiences a strong negative DEP force and is diverted into one region of the electrode array while the second type of particle experiences a weak negative DEP force and is relatively unaffected as  
10 it is moved across the array.

10. A method according to any preceding Claim further comprising the use of fluid flow to assist the manipulation of the particles.

15

11. A method of manipulating particles comprising subjecting particles suspended in a liquid to an ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the  
20 particles, the ultrasonic vibration and the varying electrical field being of different frequencies.

12. A method of manipulating particles comprising subjecting particles suspended in a liquid to an  
25 ultrasonic vibration and to a varying electrical field capable of generating a dielectrophoretic force on the particles, the ultrasonic vibration and the varying electrical field being applied in different planes.

30 13. Apparatus for treating particles suspended in a liquid comprising a chamber, means for feeding suspended particles into and out of the chamber, an electrode array on at least one wall of the chamber, means for applying to the electrode array an alternating electrical  
35 potential whereby to generate in suspended particles adjacent to the array a highly non-uniform alternating electric field so as to induce a dielectrophoretic force, and means for subjecting the liquid in the chamber to a

moving ultrasonic standing wave.

14. Apparatus according to Claim 13 in which the chamber  
is a rectangular separation chamber, there being a pair  
5 of ultrasonic transducers arranged one at each end  
thereof, and in which the means for feeding suspended  
particles into the separation chamber comprises an input  
chamber mounted transversely to the separation chamber,  
the input chamber having a pair of ultrasonic transducers  
10 arranged one at each end.

15. Apparatus according to Claim 13 in which the chamber  
is a rectangular separation chamber, there being a pair  
of ultrasonic transducers arranged one at each end  
15 thereof, and in which the electrode array is an array of  
electrode pairs along each side of the chamber, whereby  
particles which are moved across the array by the moving  
standing ultrasonic wave and which experience a strong  
negative DEP force at the applied frequency are moved  
20 towards the centre of the chamber.

STATEMENT UNDER ARTICLE 19

In the claims, claim 13 has been amended by the insertion of certain words more clearly to distinguish the subjectmatter of this claim, where the particle movement is as a result of the combination of ultrasonic and dielectrophoretic forces, from the disclosures of the sole document cited in the search report where the particle movement is as a result of a combination of ultrasonic and electrophoretic forces, the latter being generated by a uniform DC electric field. The impact of this on the text of the case will lead in due course to the amendment of the statement of invention appearing at page 5 lines 26-35.

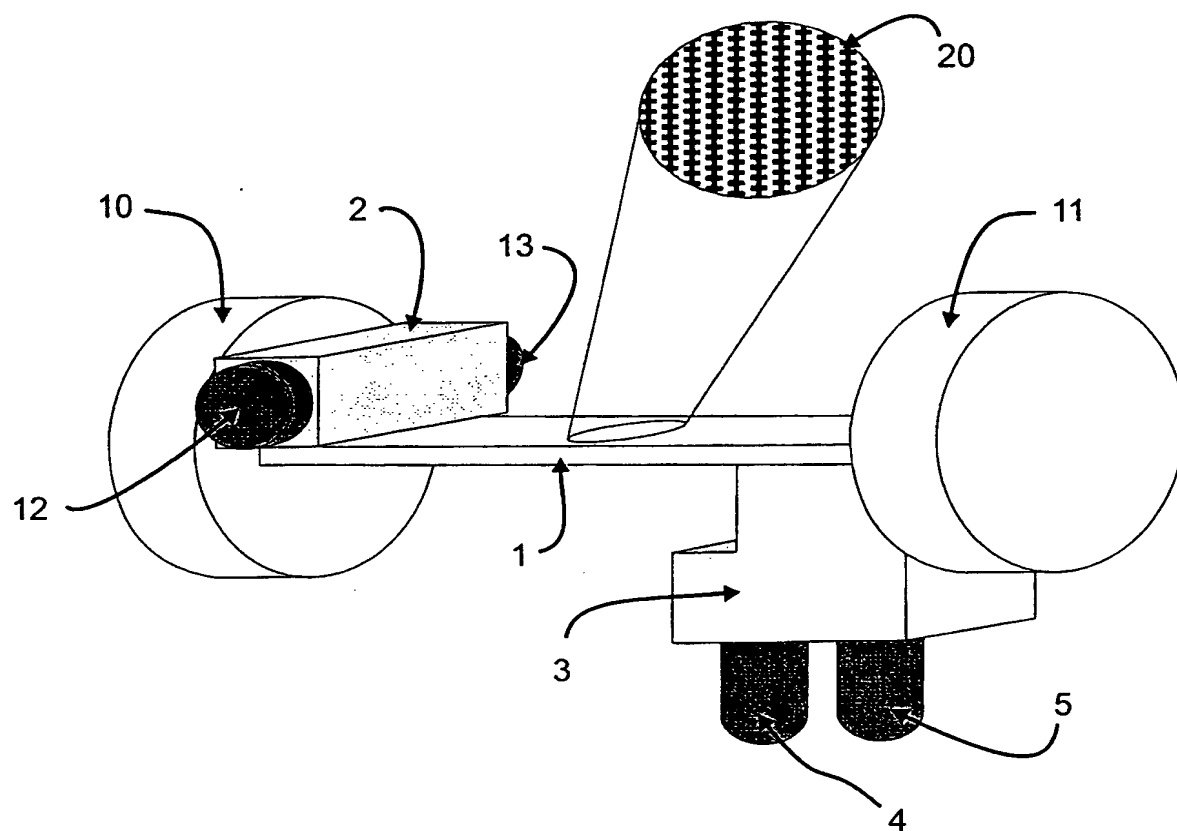


Fig. 1

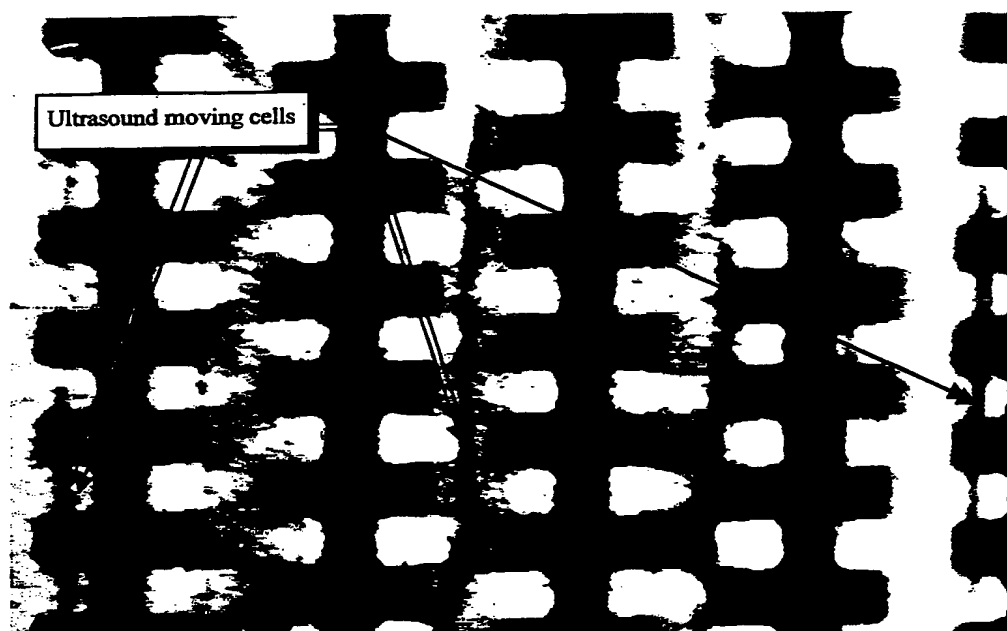


Fig. 2

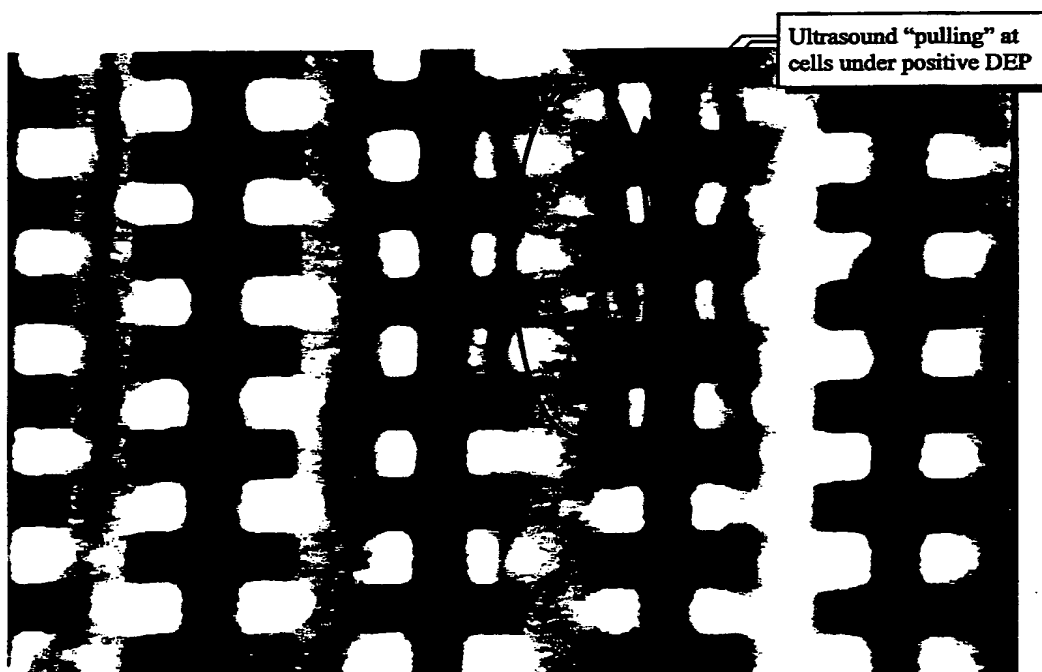


Fig. 3



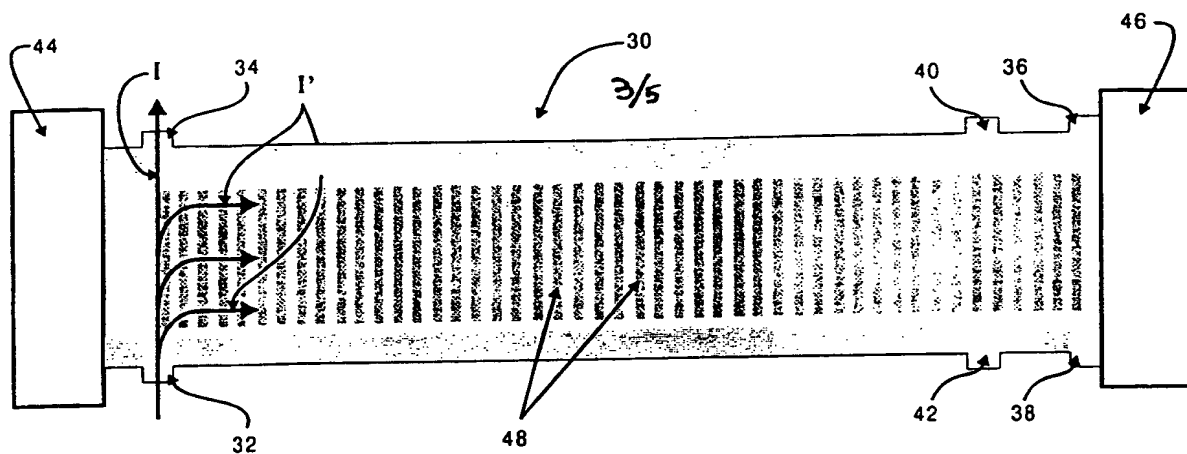


Fig. 4a

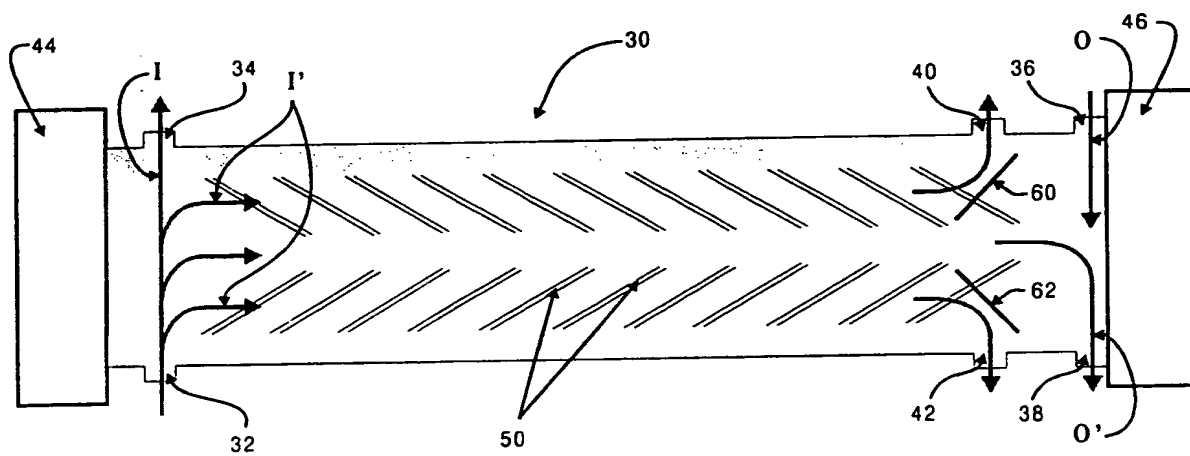


Fig. 4b

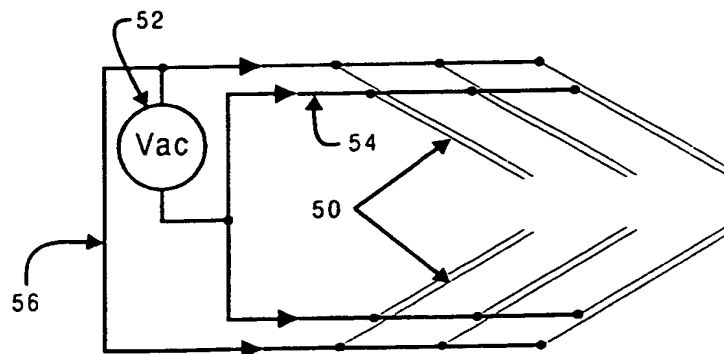


Fig. 4c

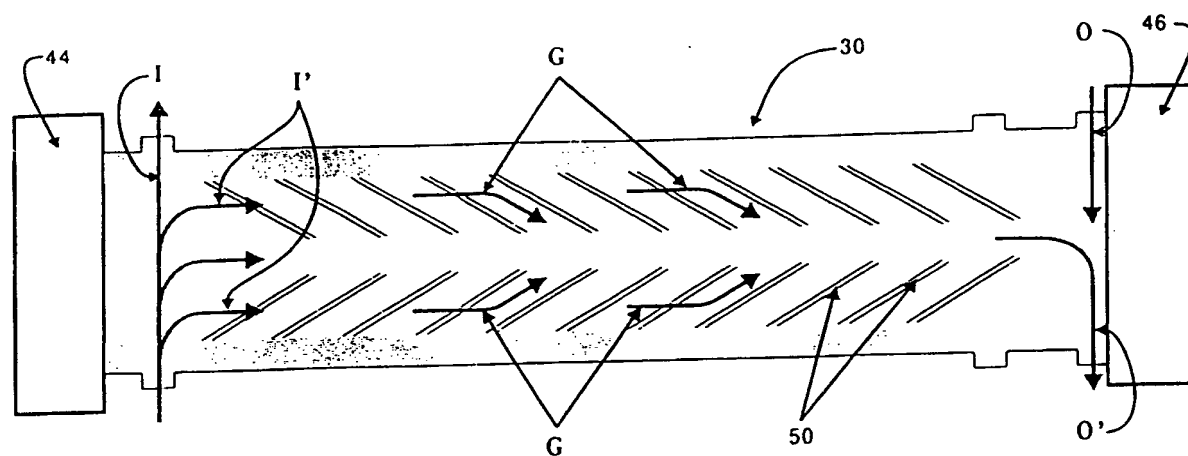


Fig. 4d

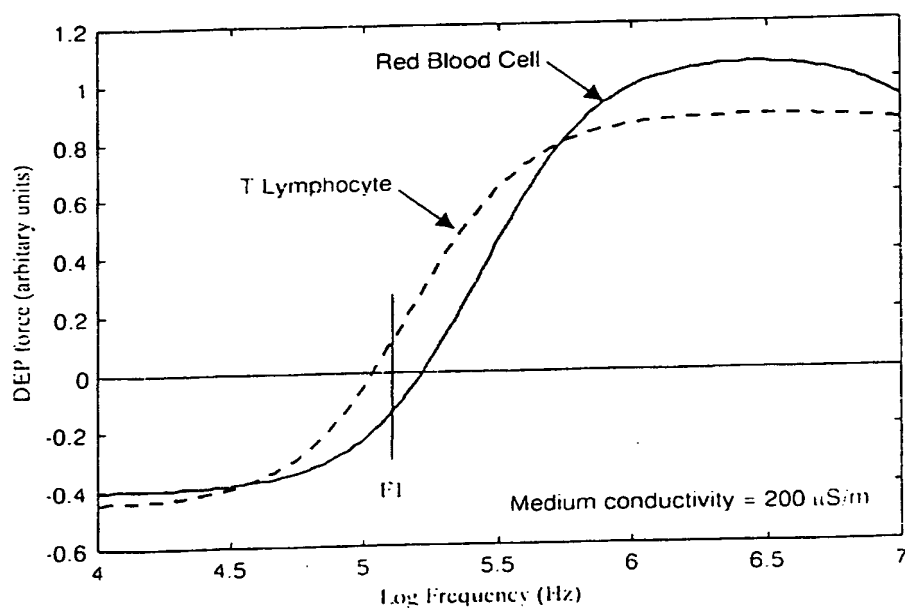


Fig. 5

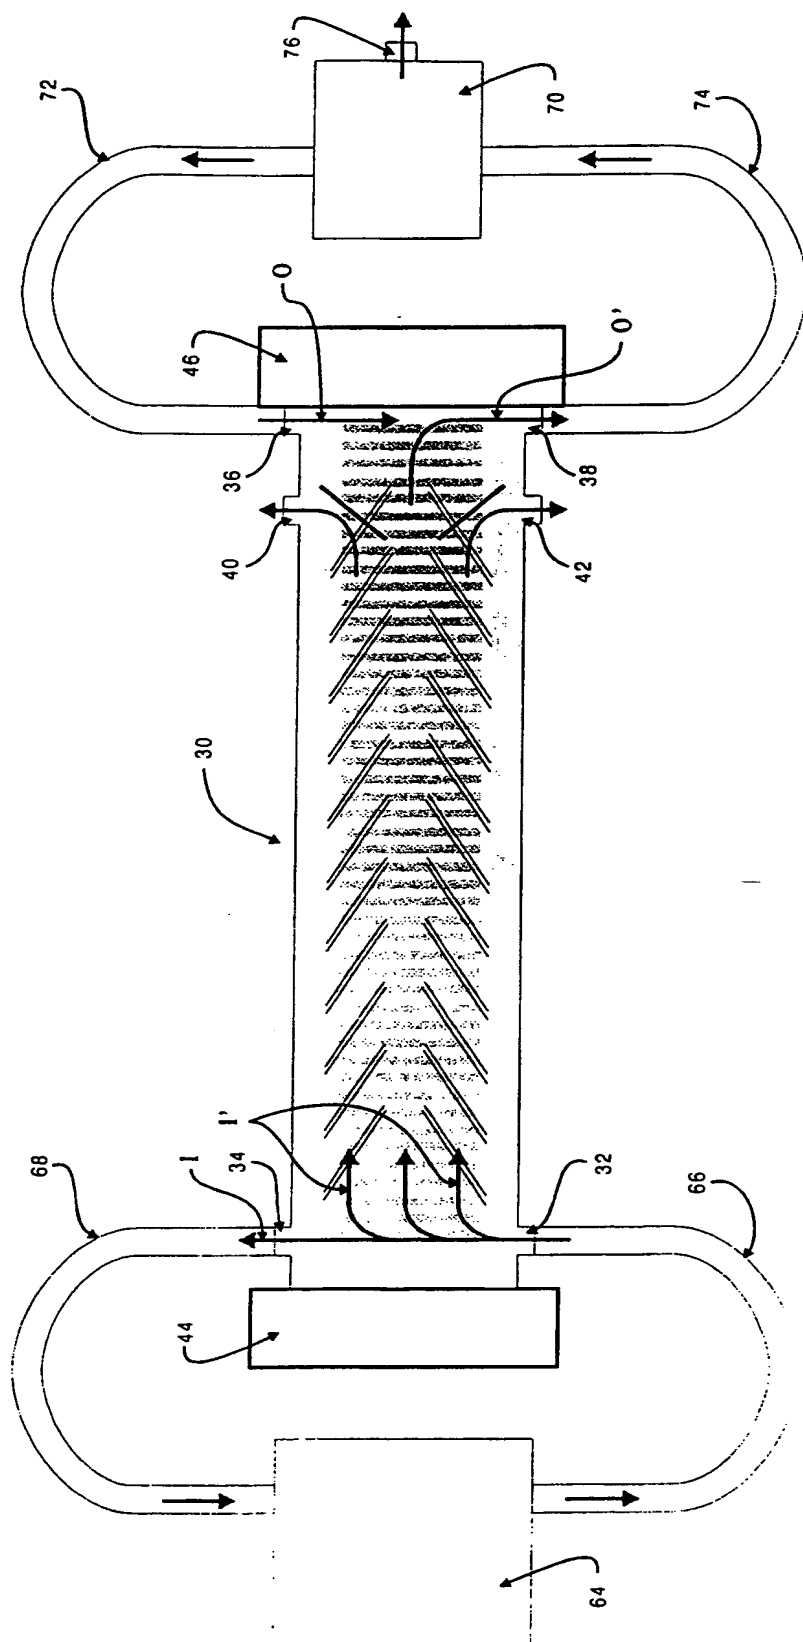


Fig. 4e

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/02803

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B03C5/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	YASUDA K ET AL: "PARTICLE SEPARATION USING ACOUSTIC RADIATION FORCE AND ELECTROSTATIC FORCE" JOURNAL OF THE ACOUSTICAL SOCIETY OF AMERICA, US, AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 99, no. 4, PART 01, 1 April 1996 (1996-04-01), pages 1965-1970, XP000599271 ISSN: 0001-4966	1, 11
X	page 1965, column 1 page 1966, column 2, paragraph 5 figure 1	13

☐ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

20 September 2000

Date of mailing of the international search report

02/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Decanniere, L

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/02801

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	MILNER K R ET AL: "DIELECTROPHORETIC CLASSIFICATION OF BACTERIA USING DIFFERENTIAL IMPEDANCE MEASUREMENTS" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 34, no. 1, 8 January 1998 (1998-01-08), pages 66-68, XP000955132 ISSN: 0013-5194 cited in the application the whole document -----	1, 10, 23